

R.1050 Rotary Spreader

Spread **P**oint

‘Reinventing the rotary spreader for the modern day farmer and contractor’



Unique 5 AXIS ROTOR



www.spreadpoint.co.uk

www.facebook.com/spreadpointuk


Spread **P**oint

© 2019 Copyright by SpreadPoint, 12 Cottage Rd, Seaforde, Co.Down Northern Ireland

R.1050 Rotary Spreader



Rotary spreaders are an old concept but the New R.1050 from SpreadPoint has modernized the old principle! Introducing new features, robust construction and quality finish parallel to our belt spreader range. The most interesting new feature within this spreader is the new unique 5 axis rotor design. This new rotor is the largest step forward in design since the movement from 2 rows of chains to 4 rows of chains. This 5 axis means lower power consumption, finer spreading and perfect balance. Only possible due to modern CAD and CAM methods allowing the rotors to be laser cut for precise fabrication ensuring each and every rotor is timed and balanced perfectly.

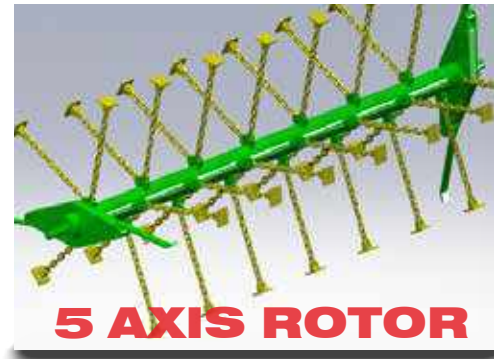

R.1050 Features

- New unique 5-Axis rotor with 5 rows of chains for lower power requirement and finer chopping
- Large 550/60R22.5 tyres
- Low maintenance single American Standard heavy duty drive chain
- Extremely rigid drawbar and under chassis
- Easy access drive box for easy greasing, no need to remove shaft
- Heavy duty 5mm lid reinforced with 6 hinge points opens vertical for easy loading
- Low center of gravity and loading height due to lowest possible barrel position.
- LED Lighting
- Heavy duty flange bearings
- 2K paint finish
- Large access door for easier cleaning
- 6mm Ends 5mm Barrel
- Steel hydraulic pipes to resist UV damage due to sunlight
- 1600mm Diameter Barrel
- Heavy duty 8 stud 90mm axle large brakes with twin brake rams.



Specifications

	Capacity Cu.yard	Capacity m3	Unladen Weight kg	Body Length mm (ft)	Body Diameter mm(ft)	Body Height mm(ft)	Loading Height mm (ft)	Axle	Brakes	Lid Hinges	Mud-guards	Tyre Size	Rear Cleaning Door	Lighting	Paint
R.1050	10.5	7.5	2100	3690 (12'1")	1600 (5'3")	2380 (7'10")	1655 (5'5")	8stud 90mm sq	Hydraulic Twin Ram	6	Standard	550/60R22.5	Standard	LED	2K Primer 2K Topcoat

